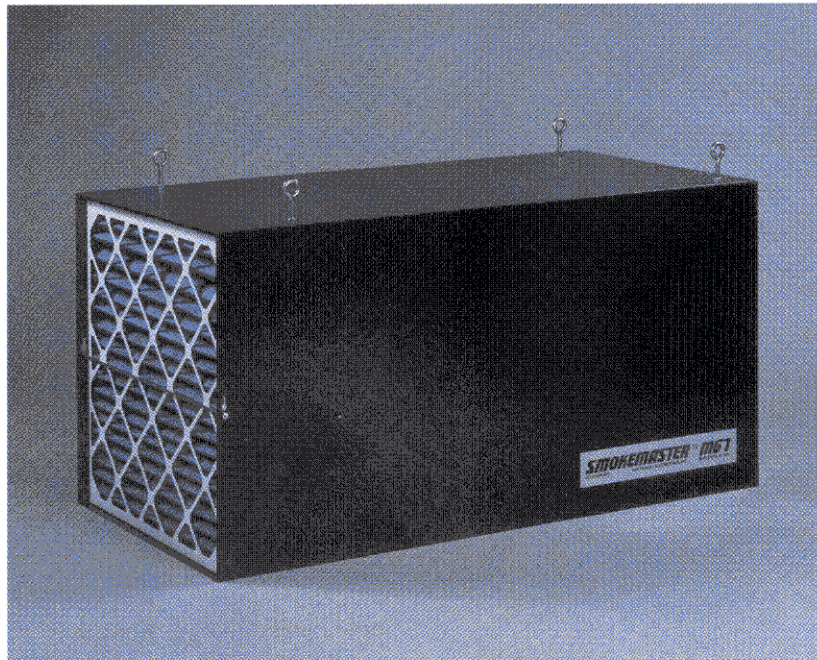

S U P P L Y I N G C L E A N A I R T O I N D U S T R Y

MODEL M67
Media Air Cleaner



The Smokemaster® M67 is a self-contained multi-stage media air cleaning system designed for general background cleaning of dust, smoke, soot or other airborne particulate. The M67 is a good choice for light duty applications such as sanding, buffing, welding or automotive refinishing at a rate of up to 1980 cfm.

M67 FEATURES & SPECIFICATIONS

STANDARD FEATURES

- Front end load mechanical filter system for easy filter access.
- Adjustable postfilter track for flexibility in postfilter selection.
- 10-foot power cord with molded plug.
- Quality engineering and workmanship backed by a 3-year parts warranty (see owners manual for warranty statement).

OPTIONAL FEATURES

- Wrap-around prefilter.
- 2" carbon filter for odor control.

DIMENSIONS: 24"H x 24"W x 47"L

WEIGHT: 118.5 lbs. Installed
160 lbs. Shipping weight

CABINET: 18-gauge steel cabinet with black enamel paint finish.

POWER INPUT:

VOLTAGE	PHASE	³ / ₄ HP AMPS
110-120	1	8.0
208-240	1	4.0

MOUNTING: Unit may be mounted to ceiling with 3/8 – 16 NC eyebolt included, or on wall with optional mounting hardware.

MOTOR: Heavy-duty ³/₄ HP, 3 speed motor with sealed ball bearings.

BLOWER: Direct drive, forward curved capable of 3650 cfm free air.

PREFILTER: 24" x 24" x 2" pleated media.

PRIMARY FILTER: 24" x 24" x 22" multi-pocket bag, or optional filter cube.

INSTRUMENTATION: Dirty Filter Gage – Factory installed pressure gage designed to determine filter replacement cycle.

FILTER ACCESS: Front load

SOUND LEVELS: Max 68 dBA at 15 ft., 71 dBA at 9 ft.

AIRFLOW EFFICIENCY:

STOCK NUMBER	FILTER	(CFM = Cubic Feet Per Minute)		
		HI	MED	LOW
41072	95% Bag	1625 cfm	1400 cfm	1250 cfm
41056	85% Bag	1690 cfm	1530 cfm	1285 cfm
41055	65% Bag	1775 cfm	1605 cfm	1300 cfm
41057	50% Bag	1950 cfm	1655 cfm	1310 cfm
41061	35% Cube	1980 cfm	1705 cfm	1380 cfm



The M67 cleans wood particles and dust from wood shops.



The M67 is perfect for autobody shops.